

# HAWKEYE INTERNATIONAL

## ASSEMBLY INSTRUCTIONS FOR THE AQUATANK 2 GALLON AQUARIUM AIR FILTER SYSTEM

**SAVE THESE INSTRUCTIONS**

### TO GET STARTED


Note: Numbers in the illustration correspond to the steps listed here

- 1) Remove aquarium from packaging.
- 2) Rinse the tank with warm water - no soap.
- 3) Press the riser tube into the filter plate.
- 4) Place the filter plate into the tank.
- 5) Connect the air stone into the end of the air line and lower into the riser tube.
- 6) Add rocks and decorations.
- 7) Place clear lens on top of tank.
- 8) Connect air line to air pump.
- 9) See "Aquarium Setup Tips" section of the manual for more information on how to successfully maintain an aquarium.
- 10) See "IMPORTANT SAFETY INSTRUCTIONS" section of the manual before operating this unit.
- 11) Add water to the fill line and allow to circulate for at least 48 hours before adding fish.
- 12) Follow instructions on de-chlorinator to treat water.
- 13) Add lamp - see "To Relamp" section below.

### To Relamp

- 1) Unplug and turn light hood over.
- 2) Unscrew tubular bulb from socket.
- 3) Screw new bulb into socket.
- 4) Lower light hood back onto top rim.
- 5) Plug light hood back in.

**WARNING - USE ONLY 7 1/2 OR 15 WATT TUBULAR TYPE APPLIANCE BULB FOR 120 VOLT 60 HZ SERVICE. DO NOT USE HIGH INTENSITY OR HALOGEN BULBS OF ANY WATTAGE AS FIRE MAY RESULT. NEVER OPERATE WITHOUT THE CLEAR LENS IN PLACE. SEE INSTRUCTIONS FOR MORE INFORMATION**

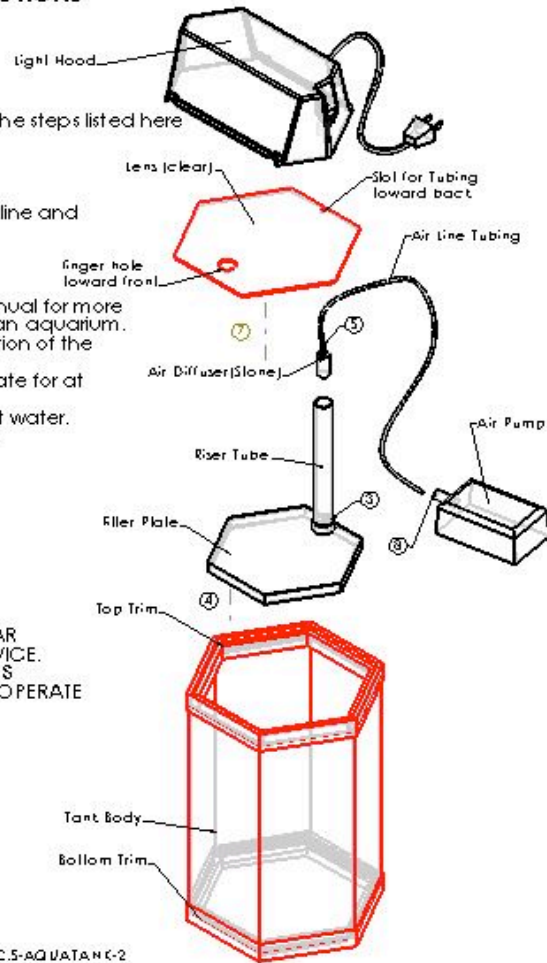

HA.DOC.5-AQUATANK-2